


Standard Configuration
Model: HL30SS

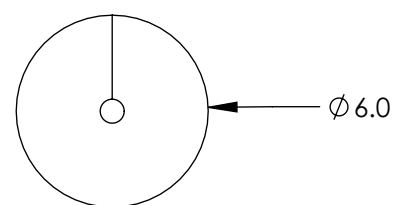

Material: 304 SST (Material sourced domestically)

Available Diameters: 3/8", 1/2", 5/8", 3/4", 1.0"

Ring: Machined Ring

Length: Available in any length (Contact Manufacturer for custom length option)

Manufactured: Minnesota, USA

Notes:

1. To properly install anchors either an engineer or architect should be consulted to determine the proper depth of concrete per soil condition.
2. Anchor pullout strength may vary depending on soil condition.
3. All dimensions are in inches.

ANCHOR MFG Eagan, Minnesota		
HL Series		
SIZE B	HL30SS	REV A